


## 7 easy steps to fit a ... Westdale 1000 Shower Tray

### Installation Notes:


Safety note: Please wear protective gloves when handling trays.

Consult your client for the position/height of the shower mixer valve/heater and install inlet water and/or electrical services.

During assembly protect shower base from scuffing using a piece of cardboard.



Square Westdale 1000

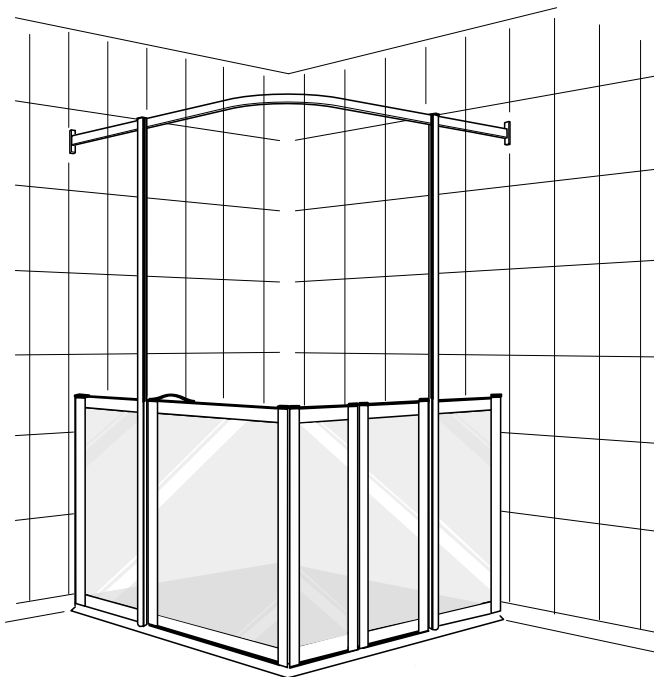

### 1. Floor removal

#### Preparing a wooden floor

Mark dimensions (from face of plaster) as Fig 1.1. Cut out floorboards as Fig 1.2. Trim any obstructions such as floor joists in area around waste trap and pipe.

#### Preparing a concrete floor

Break out screed or concrete to 20mm (3/4") depth to dimensions in Fig 1.3. You will also need to remove an area to a depth of 95mm x 125mm diameter to take the waste trap.



Note: To take up the space underneath the tray (to stop it from flexing) set the tray (showering area only) on a 3:1 dry sand and cement mix. Place tray on top for imprint, remove and position drain. Sprinkle surface with water, place tray on top and hold until secure. Always ensure the tray is level, as shown in Fig 2.1.

### 2. Marking plaster

Place the shower tray into the corner and ensure that the shower base is level along its width and length, as Fig 2.1.

Mark the plaster above the tiling lip, as Fig 2.2 and take the tray away.

Important:  
 Tiles at A and B must be level and vertical to the tray to take the wall channels.

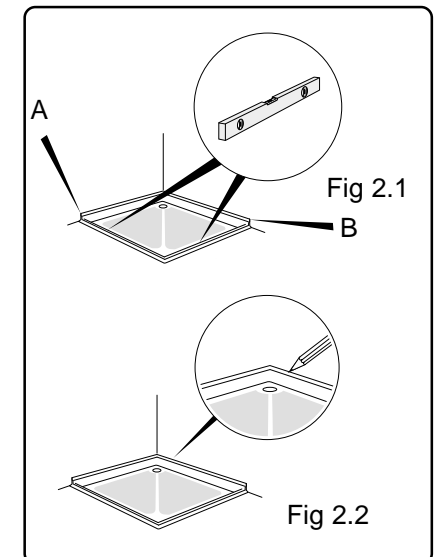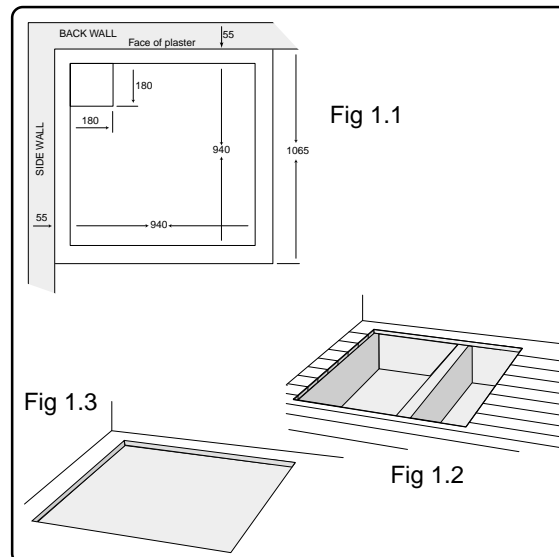

# 7 easy steps to fit a ... Westdale 1000 Shower Tray

## 3. Remove plaster


Remove the plaster below the mark you just made to a depth suitable to take the tiling lip, as Fig 3.1.

This will vary according to the thickness of the tile to be used, as Fig 3.2.

Decide on direction of waste outlet and break out wall if required, as Fig 4.1.

If it is a solid floor, break out a channel to take the waste pipe to the stack.


NOTE: Always ensure there is adequate fall of waste pipe to stack.

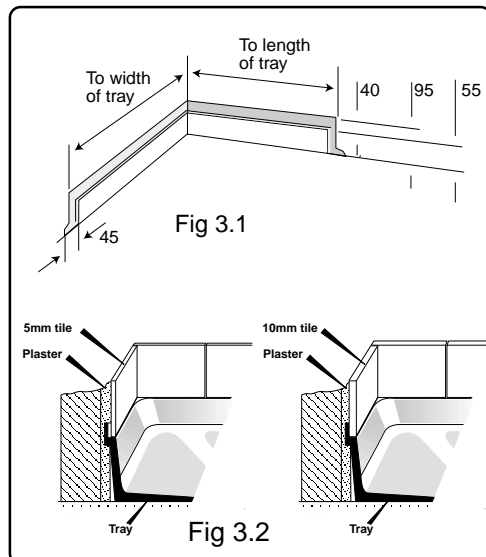

## 4. Checking level


Replace the shower tray in position. Check level as Fig 2.1. Insert packing strips to level if required.

Assemble waste trap as shown in Fig 5.1. Coat trap body and underside of shower base above and below seal with silicone sealant. Connect waste pipe to stack outlet ready for final fixing of shower tray. Drill and countersink the outer edges of the tiling lip at the points shown in Fig 6.1. Mark and plug the walls.

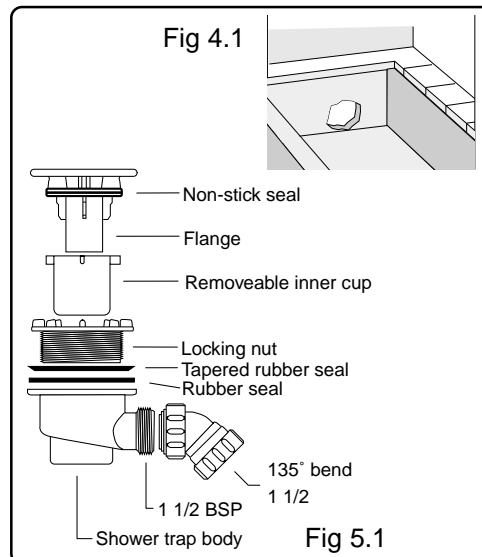

## 5. Final tray fixing

Always ensure the showerbase edges are flat and level before fixing. Fix outer edges of tiling lips securely with 1 1/2" x 8 Pozi-Drive zinc plated countersunk screws provided.

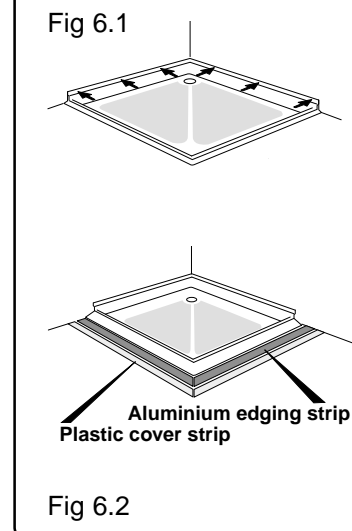


## 6. Making good

Cut to length & mitre aluminium edging strip as Fig 6.2 using a hacksaw.

NOTE: Aluminium strip must butt up to edge of tray as shown in Fig 6.3.


Drill and countersink front edge of tray and aluminium edging strip, as Fig 6.3. White cover strip should be fitted after floor covering has been laid. Check to make sure the tray is level before final fixing.

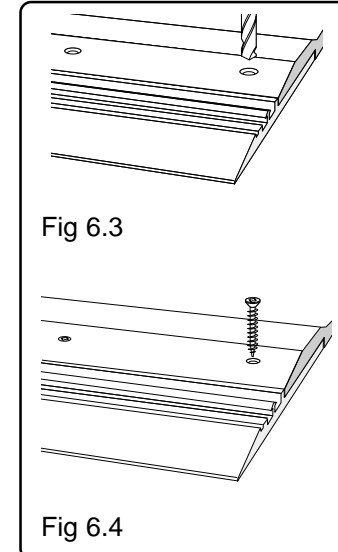

## 7. Before tiling

Ensure any plumbing and electrical work has been completed. Make good plaster work. Tile down to the angle of the tiling lip using waterproof adhesive and grout.

Anti-slip flooring should finish over the aluminium edging strip as Fig 6.5. Apply a bead of mastic to tray edge and edging strip as shown in Fig 7.1. Finally knock the plastic trim cover into place, taking care to lock the components together as Fig 7.2.

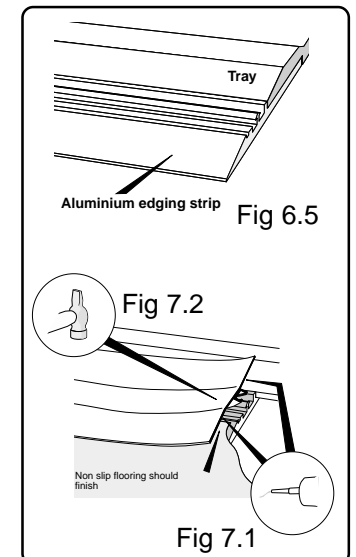

# 6 easy steps to fit a ... Westdale 1000 Shower Enclosure

## 1. Marking wall

**Note:** Each jamb is handed. Check the seal on the glazing panel faces into the tray.

**Note:** Ensure bottom fixing plate with holes facing outwards is in position, as Fig 3.2. Place the Westdale jamb with full height pole onto the side of the tray.

Position jamb approximately 55mm from the edge, as Fig 1.1. Make sure it is vertical as Fig 1.2 and mark the wall alongside the wall channel as Fig 1.3.

**Note:** Pole supplied separately.

## 2. Drilling the wall/fixing jamb

Remove channel from jamb and place on to wall, as Fig 2.1. Using a pencil mark through the slots, as Fig 2.2 and drill the wall 50mm deep (2") using a 5.5mm drill, as Fig 2.3. Apply a film of silicone sealant to the inside edge of the wall channel. Secure to wall with wall plugs and 1 1/2" x No 8 screws.




Push panel into wall channel. Fasten loosely with self tapping screws, slot covers and shakeproof washers provided.

Repeat with pole door receiver section as Fig 3.1 ensuring fixing plate is in position, as Fig 3.2. Check panel is level horizontally and vertically. Screws are fully tightened later. The pole fixing plate is also screwed in position later.

## 3. Fixing second jamb

Repeat steps one and two for fixing the other jamb as Fig 4.1.

Right hand option illustrated, opposite for left hand.

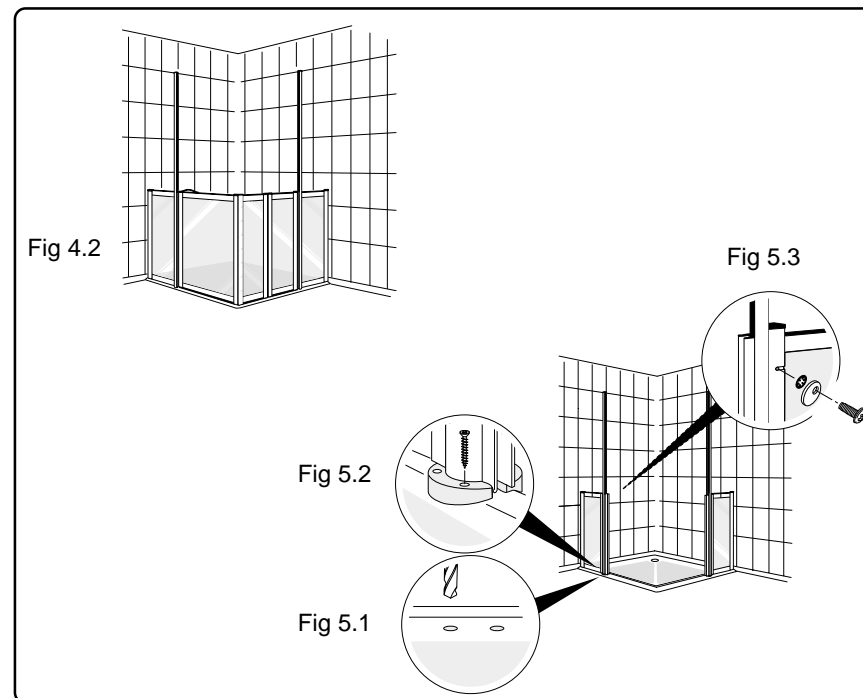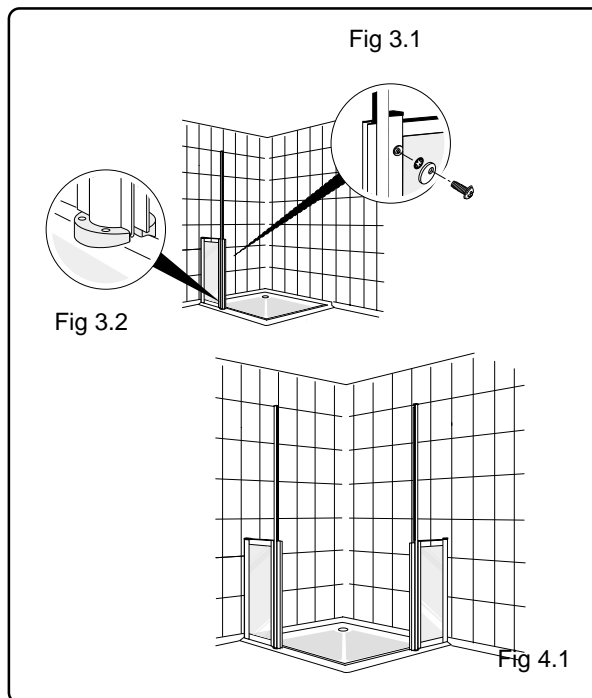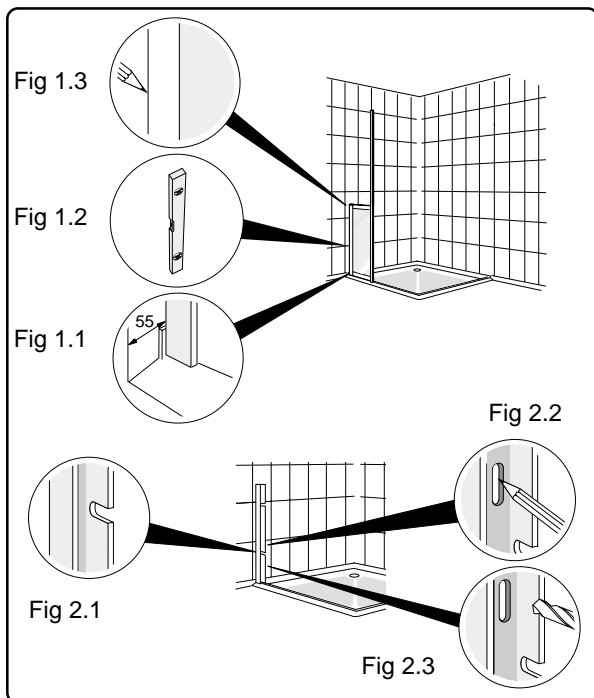

# 6 easy steps to fit a ... Westdale 1000 Shower Enclosure

## 4. Fixing tri-fold doors

NOTE: Doors always open outwards.  
Place the tri-fold door onto the tray in its fully closed position ensuring the bottom seal is in contact with the tray as Fig 4.2. Align the jambs correctly. Drill and fix both the pole fixing plates to the tray with the cheese head screws provided, as Fig 5.1 and 5.2.

Re-check that the doors open and close properly. When satisfied fully tighten all the screws, slot covers and shakeproof washers, as Fig 5.3.

## 5. Fitting end caps



Fit end caps, as shown in Fig 6.1 and snap in pole cover strips in both full height poles, as Fig 6.4.

## 6. Fit curtain rail brackets and curtain

Position curtain rail at height to connect to bracket at top of grab poles. Check level and mark walls for fixing wall brackets, as Fig 7.1. Drill wall with 5.5mm drill to a depth of 2" (50mm). Fix curtain rail brackets to wall with plugs and 1½" x 8 screws, as Fig 6.2.

Load hooks and glides into bottom channel of curtain rail. Place two M5 nuts in top channel of curtain rail, as Fig 7.2. Attach to brackets and tighten with the allen key provided, as Fig 6.3. Check poles are vertical.

Using M5 x 10mm long stainless steel bolt attach to curtain rail with nuts already in place as in Fig 7.1. Using ¾" x 6's stainless steel screws secure pole bracket to top of pole rail, as Fig 7.2. Attach shower curtain to hooks on rail, as Fig 6.4.

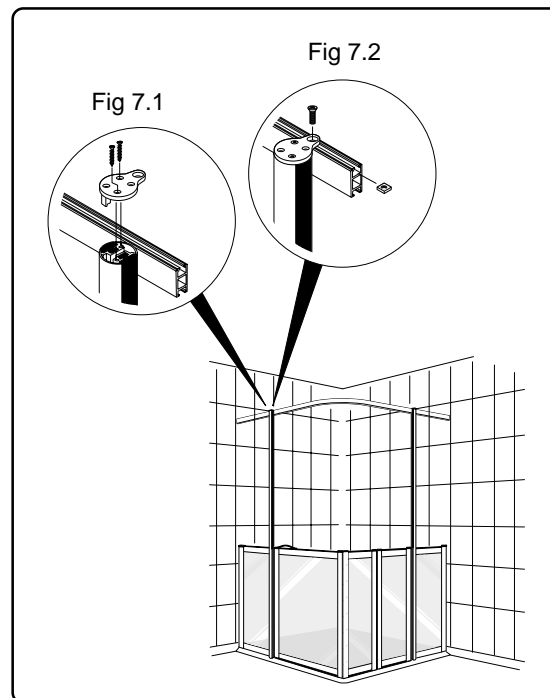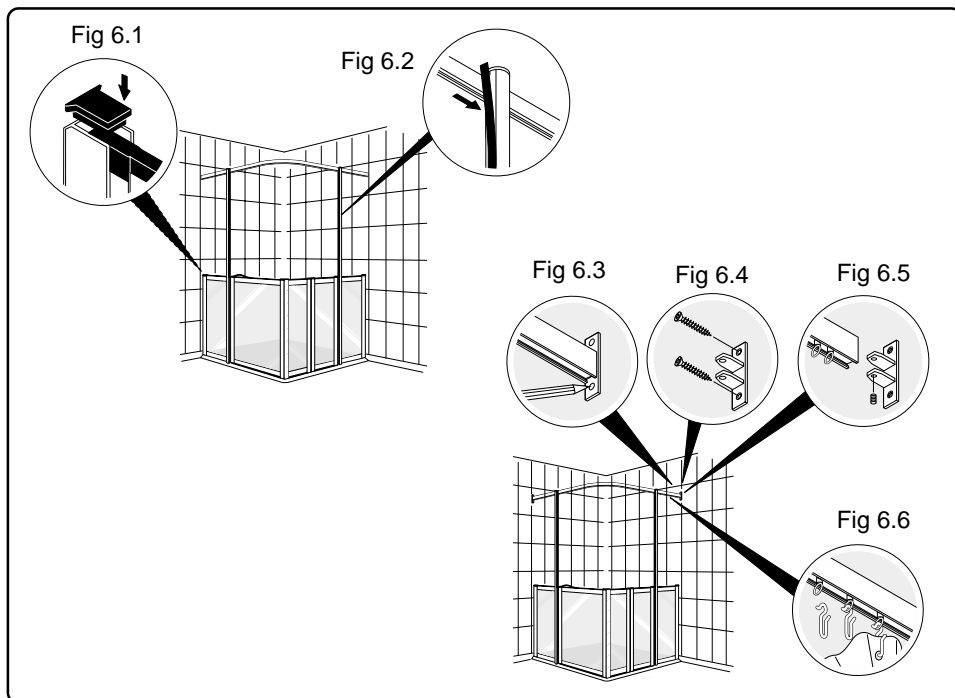

## If you require additional help

**Northern Division**  
66-68 Manchester Road, Chapel-en-le-Frith, High Peak  
SK23 9TP  
Tel: 01298 816366 Fax: 01298 816106  
**Southern Division**  
6 Wedgwood Road Bicester Oxon OX26 4UL  
Tel: 01869 246470 Fax: 01869 247214  
**Northern Ireland**  
5 Balloo Way, Balloo Industrial Estate, Bangor,  
Co Down BT19 7QZ  
Tel: 028 9145 0497 Fax: 028 9127 0046