


# SHOWER TRAY SPECIFICATION GUIDE - LEVEL ACCESS

See pages 72-73 for details of How to order

## SANDWELL MK3 655 MODEL (SLIDE & FOLD DOOR - ALCOVE INSTALLATION)

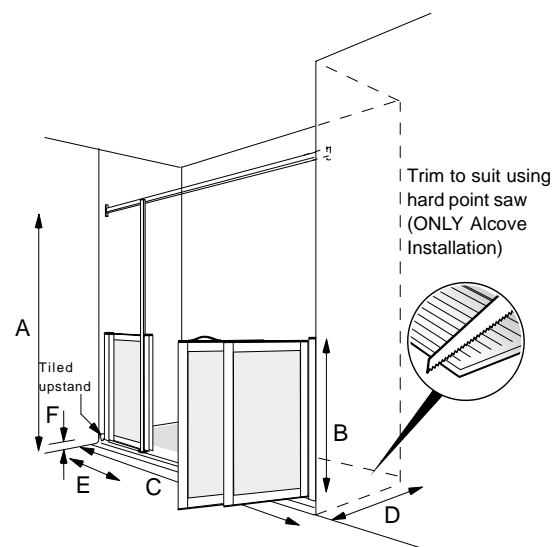

Left hand shower tray Illustrated

### SHOWER CHAIR COMPATIBILITY



Self propelled models



Attendant propelled models

REF	DIMENSIONS	SANDWELL 655 LEFT HAND TRAY	JAMB DETAIL
A	1950		
B	820		
C	1850**		
D	715		
E	299		
F	65		
Thick black line denotes wall position			
REF	DIMENSIONS	SANDWELL 655 RIGHT HAND TRAY	JAMB DETAIL
A	1950		
B	820		
C	1850**		
D	715		
E	299		
F	65		
Thick black line denotes wall position			


### Notes

**Door size:** 1800mm (including jamb)

**Internal showering area:** L= 1800mm x W=635mm

- Dimension A is to the top of the assistance pole (from the shower tray). A 2.5m floor to ceiling, or 2.5m floor to curtain rail pole (to special order) are also available (both can be trimmed).
  - The Sandwell 655 is supplied with edging strips for use with a suitable Altro flooring system - (only one strip is used for alcove installation on the longest edge (C). Add 30mm to dimension C.
  - Dimensions C&D are measured from the face of the tiling lip
  - The drying area length can be cut to suit - to a minimum of 1200mm. It is recommended that trays which have been trimmed should be used in an **alcove installation only**
- \* Dimension indicates position that door will fold to before encroaching on the back wall  
 \*\* Stud wall to be built onto drying area leaving a maximum dimension tile to tile of 1800mm.

## SANDWELL MK3 760 MODEL (SLIDE & FOLD DOOR - ALCOVE INSTALLATION)

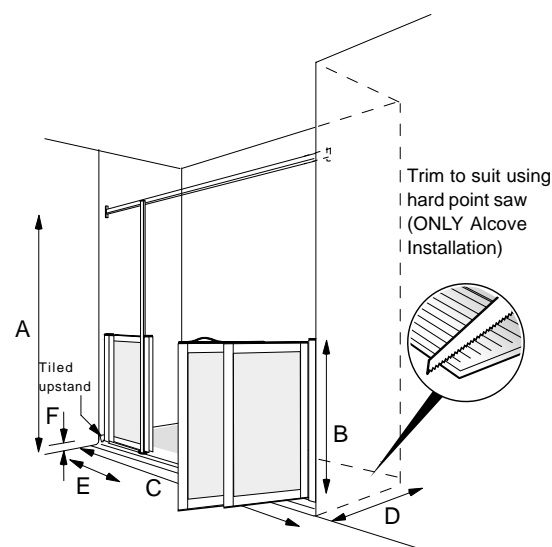

Left hand shower tray Illustrated

### SHOWER CHAIR COMPATIBILITY



Self propelled models



Attendant propelled models

REF	DIMENSIONS	SANDWELL 760 LEFT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850**		
D	820		
E	299		
F	65		
Thick black line denotes wall position			
REF	DIMENSIONS	SANDWELL 760 RIGHT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850**		
D	820		
E	299		
F	65		
Thick black line denotes wall position			

### Notes

**Door size:** 1800mm (including jamb)

**Internal showering area:** L= 1800mm x W=740mm

- Dimension A is to the top of the assistance pole (from the shower tray). A 2.5m floor to ceiling, or 2.5m floor to curtain rail pole (to special order) are also available (both can be trimmed).
  - The Sandwell 760 is supplied with edging strips for use with a suitable Altro flooring system - (only one strip is used for alcove installation on the longest edge (C). Add 30mm to dimension C.
  - Dimensions C&D are measured from the face of the tiling lip
  - The drying area length can be cut to suit - to a minimum of 1200mm. It is recommended that trays which have been trimmed should be used in an **alcove installation only**
- \*\* Stud wall to be built onto drying area leaving a maximum dimension tile to tile of 1800mm.

### SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk


Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk

# SHOWER TRAY SPECIFICATION GUIDE - LEVEL ACCESS

See pages 72-73 for details of How to order

## SANDWELL MK3 655 MODEL (TRIFOLD DOOR - CORNER INSTALLATION\*)

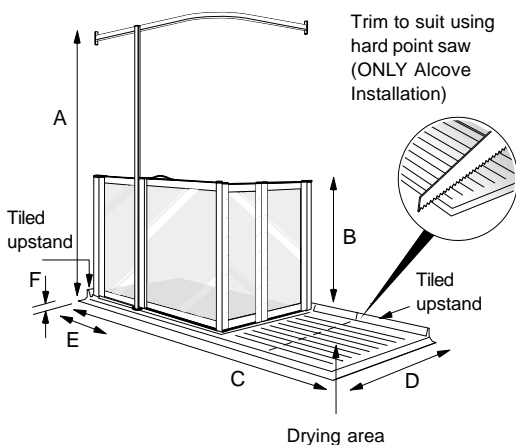

Left hand shower tray Illustrated

### SHOWER CHAIR COMPATIBILITY



Self propelled models



Attendant propelled models

REF	DIMENSIONS	SANDWELL 655 LEFT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850		
D	715		
E	299		
F	65		
Thick black line denotes wall position			
REF	DIMENSIONS	SANDWELL 655 RIGHT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850		
D	715		
E	299		
F	65		
Thick black line denotes wall position			

### Notes


**Door size:** 1000mm x 655mm (including jamb)

**Internal showering area:** L= 980mm x W=635mm

1. Dimension A is to the top of the assistance pole (from the shower tray). A 2500mm floor to ceiling, or 2500mm floor to curtain rail pole are also available (both can be trimmed)
2. The Sandwell 655 is supplied with edging strips for use with a suitable Altro flooring system. Add 30mm to dimensions C&D
3. Dimensions C&D are measured from the face of the tiling lip
4. The drying area length can be cut to suit - to a minimum of 1200mm. It is recommended that trays which have been trimmed should be used in an **alcove installation only**
5. Rising butt hinge lifts the door 7mm and incorporates a 180 degree hinge to allow full flexibility

\* May be used on alcove installation if required. Stud wall to be built onto drying area leaving a maximum dimension tile to tile of 1800mm.

## SANDWELL MK3 760 MODEL (TRIFOLD DOOR - CORNER INSTALLATION\*)

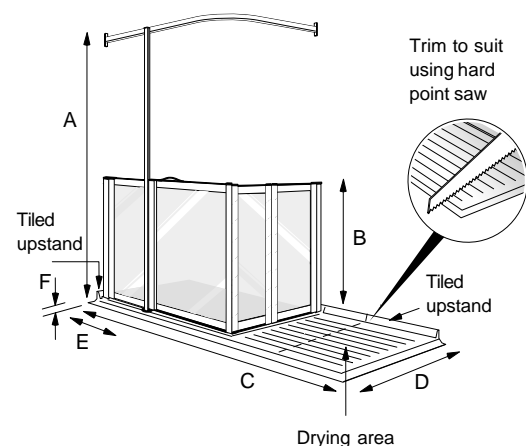

Left hand shower tray Illustrated

### SHOWER CHAIR COMPATIBILITY



Self propelled models



Attendant propelled models

\* May be used on alcove installation if required. Stud wall to be built onto drying area leaving a maximum dimension tile to tile of 1800mm.

REF	DIMENSIONS	SANDWELL 760 LEFT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850		
D	820		
E	299		
F	65		
Thick black line denotes wall position			
REF	DIMENSIONS	SANDWELL 760 RIGHT HAND TRAY	JAMB DETAIL
A	1950		
B	834		
C	1850		
D	820		
E	299		
F	65		
Thick black line denotes wall position			

### Notes

**Door size:** 1000mm x 760mm (including jamb)

**Internal showering area:** L= 980mm x W=740mm

1. Dimension A is to the top of the assistance pole (from the shower tray). A 2500mm floor to ceiling, or 2500mm floor to curtain rail pole are also available (both can be trimmed)
2. The Sandwell 760 is supplied with edging strips for use with a suitable Altro flooring system. Add 30mm to dimensions C&D
3. Dimensions C&D are measured from the face of the tiling lip
4. The drying area length can be cut to suit - to a minimum of 1200mm. It is recommended that trays which have been trimmed should be used in an **alcove installation only**
5. Rising butt hinge lifts the door 7mm and incorporates a 180 degree hinge to allow full flexibility

### SYMBOLS:

Bulk/oversized item



Made to order (see P200)



Tel: 0800 917 0399

www.chilterninvadex.co.uk

Fax: +44 (0) 1869 365588

sales@chilterninvadex.co.uk